



SCALA



ART.CODE	VOLTAGE	P1 W	P2 W	N rpm	In A
SCALA1 3-25	240	540	350	3450	2.37
	110	560	350	3450	5.1
SCALA1 3-35	240	650	470	3400	2.76
	110	650	470	3400	5.71
SCALA1 3-45	240	870	570	3350	3.72
	110	950	590	3400	8.62
SCALA1 5-25	240	600	420	3450	2.6
	110	610	450	3450	5.7
SCALA1 5-55	240	1250	810	3450	5.25
	110	1250	860	3450	11.57
SCALA2	110	550	450	5200	2.8
	240	550	450	5200	2.8

ITEM TECHNICAL CHARACTERISTICS




- 1 INCORPORATES VARIABLE SPEED CONTROL TO MAINTAIN ADEQUATE PRESSURE
- 2 EASY INSTALLATION IN THREE SIMPLE STEPS: PIPE CONNECTION, PRIMING, AND PLUG-IN TO START
- 3 SELF-PRIMING CAPABILITY ALLOWS PUMPING FROM DEPTHS OF UP TO 8 METERS
- 4 AUTOMATIC PROTECTION AGAINST DRY RUNNING, WATER SHORTAGE, OVERLOAD, AND OTHER
- 5 AUTOMATIC RESET FUNCTION WITH UP TO 8 ATTEMPTS EVERY 5 MINUTES
- 6 BUILT-IN PRESSURE TANK REDUCES WEAR ON THE PUMP BY MINIMIZING START-STOP CYCLES
- 7 CONECTION SIZE G 1"
- 8 POWER SUPPLY 110-240 V, 50/60 Hz, MAX PRESSURE 10 bar

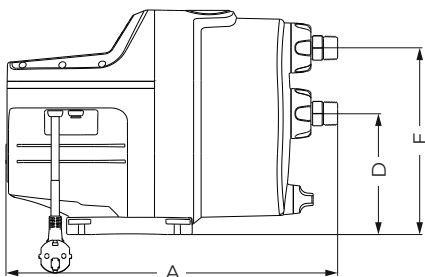

ART.CODE	A	B	C	D	E
SCALA1	466	202	316	171	263
SCALA2	403	193	302	114	234



PERFORMANCE RANGE

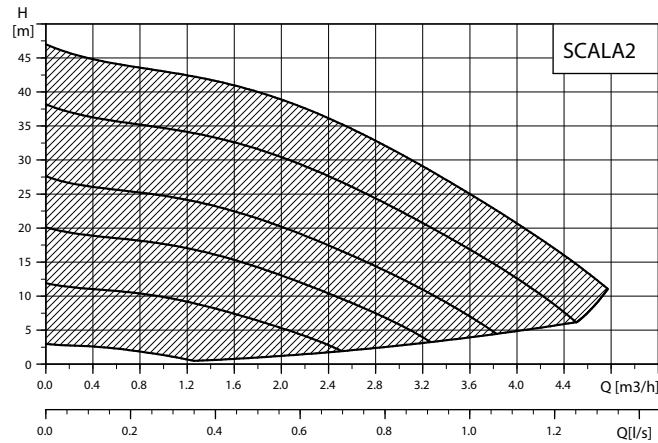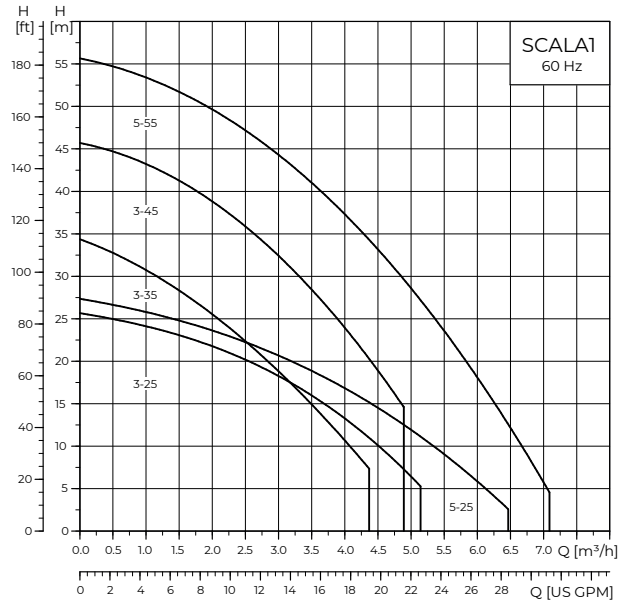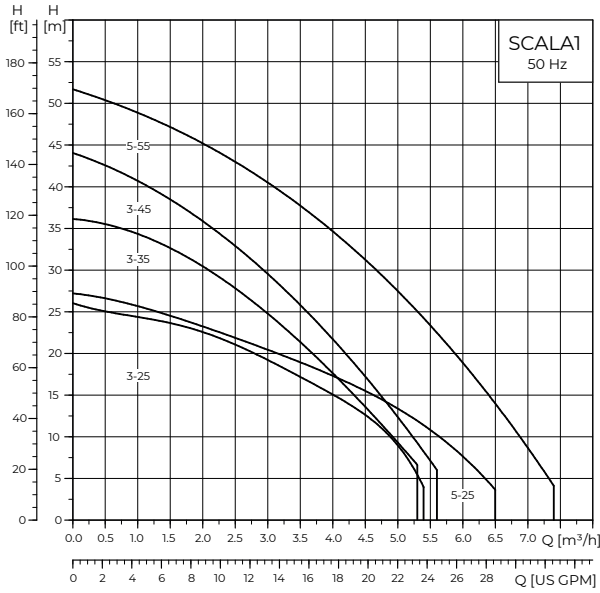

All rights reserved by iSinitzan. Reproduction and distribution of any part of this document is prohibited.




HPRESS



ITEM TECHNICAL CHARACTERISTICS


- 1 SELF-PRIMING MULTISTAGE PUMP DESIGNED TO FUNCTION AS A PRESSURE BOOSTING SYSTEM
- 2 MANUFACTURED WITH STAINLESS STEEL AND EQUIPPED WITH A PERMANENT MAGNET MOTOR
- 3 VERY LOW NOISE LEVEL, BELOW 55 DB(A), SUITABLE FOR INSTALLATION IN LIMITED INDOOR SPACES
- 4 EASY OPERATION WITH AUTOMATIC FUNCTION VIA A SIMPLE LCD SCREEN
- 5 WIDE RANGE OF FLOW AND PRESSURE PERFORMANCE, OFFERING TOP EFFICIENCY
- 6 MOTOR PROTECTIONS INCLUDE DRY RUNNING, MOTOR OVERLOAD, LEAKS, AND OVERHEATING
- 7 CAN BE INSTALLED IN SETS OF UP TO 6 PUMPS IN PARALLEL CONNECTED TO EACH OTHER
- 8 EFFICIENT AND INTELLIGENT PUMP CONCEPT FOR DEMANDING RESIDENTIAL APPLICATIONS

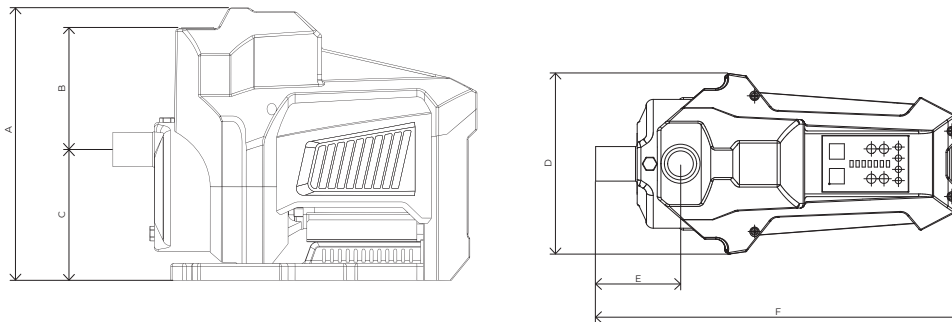

ART.CODE	DNA	DNI	A	B	C	D	E	F
HPRESS 4	G1"	G1"	290	132	140	194	91	392
HPRESS 8	G2"	G2"	380	160	220	194	70	492



PERFORMANCE RANGE

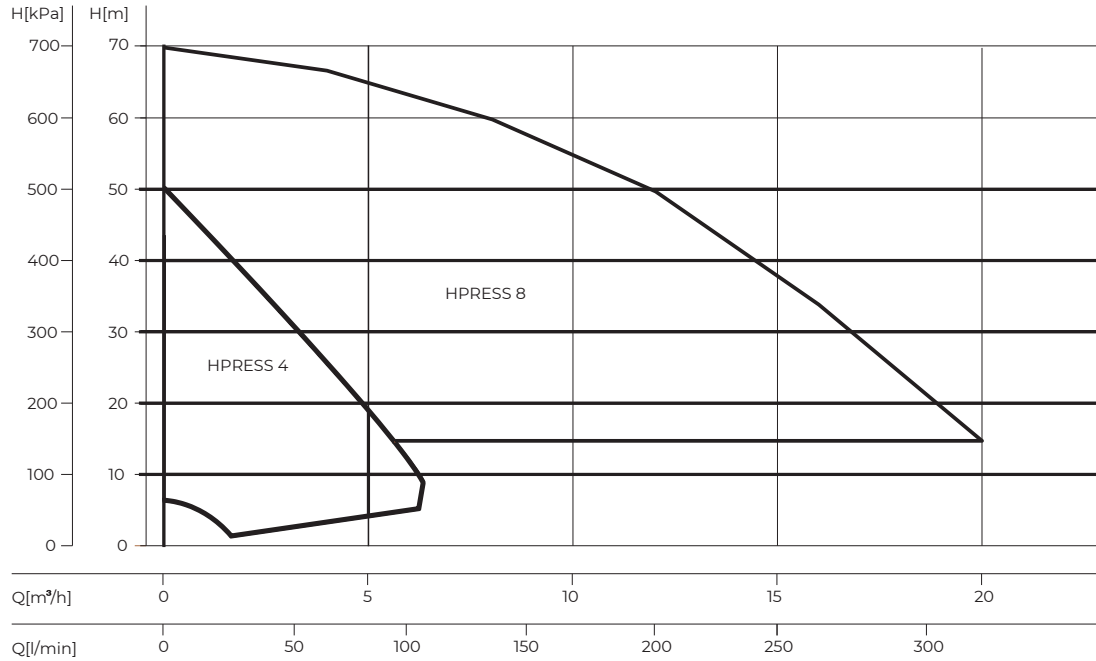

ART.CODE	P2	MAX. FLOW	MAX. HIGH	NOMINAL FLOW	NOMINAL HIGH	SUCTION	MAX. SUCTION
HPRESS 4	0.75 kW	5.8 m³/h	50 m	3 m³/h	31 m	25 mm	8 m
HPRESS 8	2.2 kW	20 m³/h	68 m	8 m³/h	60 m	50 mm	8 m

